




## Kerrville Fire Marshal

87 Coronado Drive Kerrville, Texas 78028  
Office: (830) 257-8449 Fax: (830) 257-8455



### FIRE DEPARTMENT CONNECTION (FDC) SIGN DESIGN REQUIREMENTS

1. Sign shall be constructed from a 15" high by 18" wide metal substrate no thinner than .063.
2. Sign shall have rounded corners.
3. Background color of sign shall be "Fire Engine Red" non-reflective.
4. White reflective letters shall be used as set out below.
  - a. Letter shall be a font comparable to "Folio medium" or "Helvetica medium".
  - b. First line (FDC) shall be 6" high letters with 3" between letters.
  - c. Second and third lines shall be 2" high letter with  $\frac{1}{2}$ " spacing between letters.
  - d. There shall be a 1" margin completely around sign and 1" spacing between lines of text.
  - e. There shall be 2" spacing between complete words.
  - f. The second line shall have the building address numbers
  - g. Where applicable, the third line shall have the building number (alpha or numeric as assigned by Kerr County 911) if the FDC system supplies the fire sprinkler system to only one building in a multi-building complex, or the individual lease space number where the FDC only supplies a sprinkler system to an individual lease space.

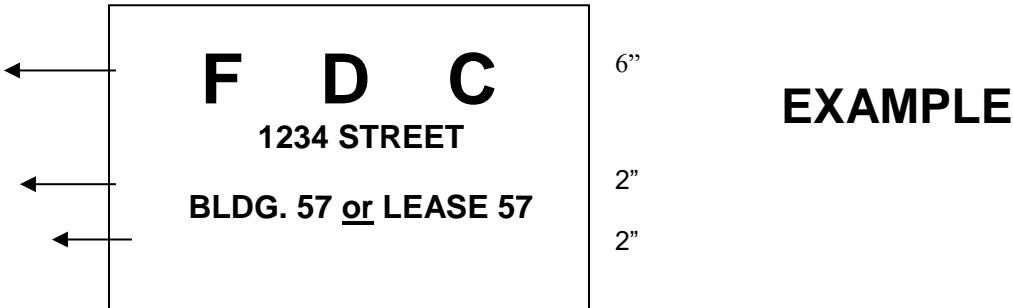

5. The sign shall be permanently attached to a wall directly above a wall mounted fire department connection.
  - a. Where the sign is attached to the building, it shall be 72" from the ground to the bottom of sign, unless otherwise approved by Fire Marshal.
  - b. Where the sign is to be mounted to a remote FDC, it shall be mounted on a galvanized steel pipe (*chain link fence post*). The post shall be mounted behind the FDC within 1 to 1 $\frac{1}{2}$  feet from the FDC or an area approved by the Fire Marshal. The post shall be set in concrete below ground. The sign shall be mounted to the post 4 to 6 inches above the FDC. The sign shall be mounted to the post using stainless one-way screws or stainless bolts using a stainless locking nut. The post shall be cut to 4 inches above the sign and a cap placed on top of the post.